



Philips Consumer Lifestyle

# ServiceManual

## PRODUCT INFORMATION

### Safety

- This product meets the requirements regarding interference suppression on radio and TV.
- After the product has been repaired, it should function properly and has to meet the safety requirements as officially laid down at this moment.

## TECHNICAL INFORMATION

- Colour : Valentine Red Metallic
- Power consumption : 1800 W
- Duststorage capacity : 1,7 liter
- Cord length : 6 m
- Action radius : 9 m
- Filter system : HEPA 10 filter
- Outlet : Microfilter
- Noise : 80 dB
- Power control : Electronic on appliance
- Coupling : Conical
- Dimensions of the appliance : 33,5 x 54 x 32,5 cm
- Weight : 6 kg

## ACCESSORIES

- Nozzle : Multi nozzle
- Tubes : Aluminium 2-pieces telescopic tube
- Accessories : Crevice nozzle and Small nozzle
- Accessory storage : Clip on Tube
- Bend : Curved Bend with airslide


## REPAIR INSTRUCTION

- No specific issues


## OPTIONAL (accessories)

- FC8058 : Replacement Filter set

- To open the appliance, first remove the bucket by pushing the dislock-button and lifting the bucket straight upwards, and remove the Exhaust grille and filter.
- To disassemble the Upper housing:  
Remove the CW Button and On/off button by using a screwdriver to push the buttons upwards, in this way the clicknocks can be loosened. (see picture)

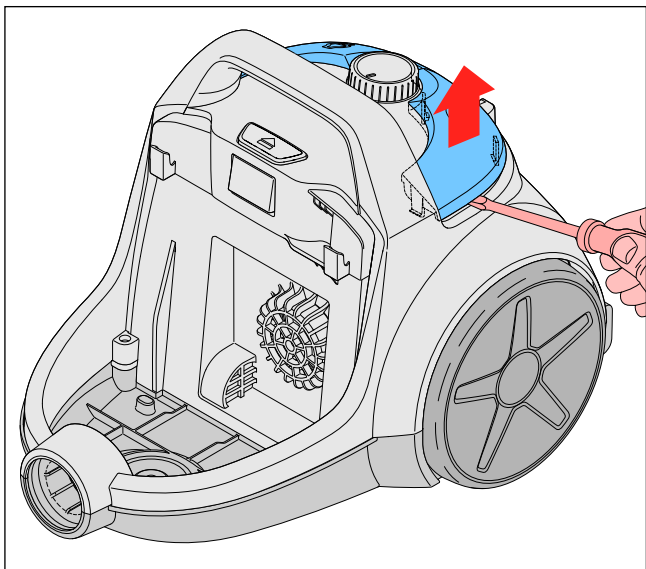


- Remove the 6 screws (B), two are positioned under the buttons. (see exploded view on page 6-9)
- To remove the Upperhousing:  
Place one hand on the handle and the other hand in the bottom of the Dustchamber, now simultaneously pull on the handle and push at the bottom to separate the upperhousing from the appliance. (see picture)

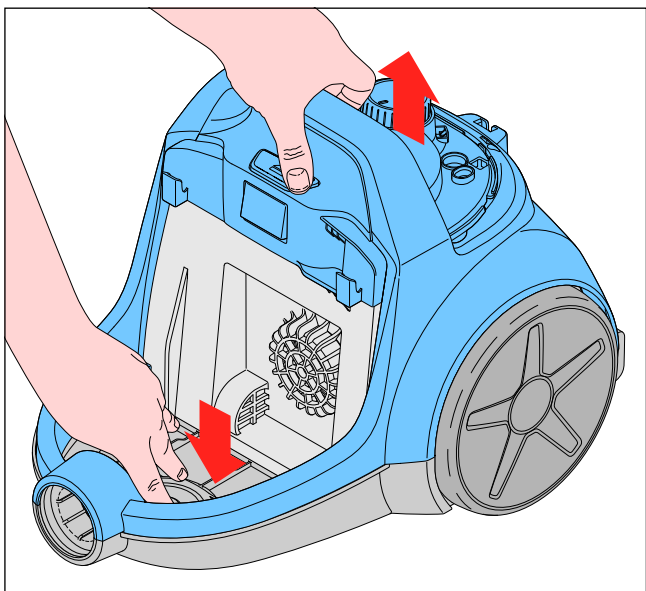


- Disconnect the connector from the potmeter PCBA (18).


- To remove the Turning knob (11) & Potmeter PCBA (18):  
Turn the Upper housing upside down and remove the 2 screws (C). The Potmeter PCBA can now be removed and replaced.
- Turning knob (11) can be pushed to the outside with a screwdriver.
- The Cordwinder can be removed by pulling it in upwards direction, the Cordwinder can be replaced by placing it back in the opposite direction.
- To remove the Motor housing:  
Remove the 2 screws (D) and unclick the clicknocks with a screwdriver. Start with the left clicknock. (see picture)

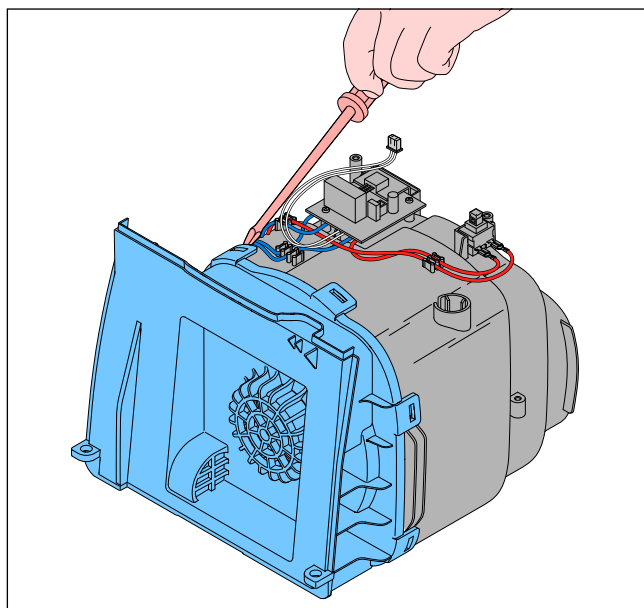



- To re-assemble the Motor housing:  
Lead the wires in the correct way and click the knocks in place.  
**Remark:** To replace the Motor housing in the Lower housing it is advisable to use a magnetic screwdriver, otherwise the appliance should be laid on its side.

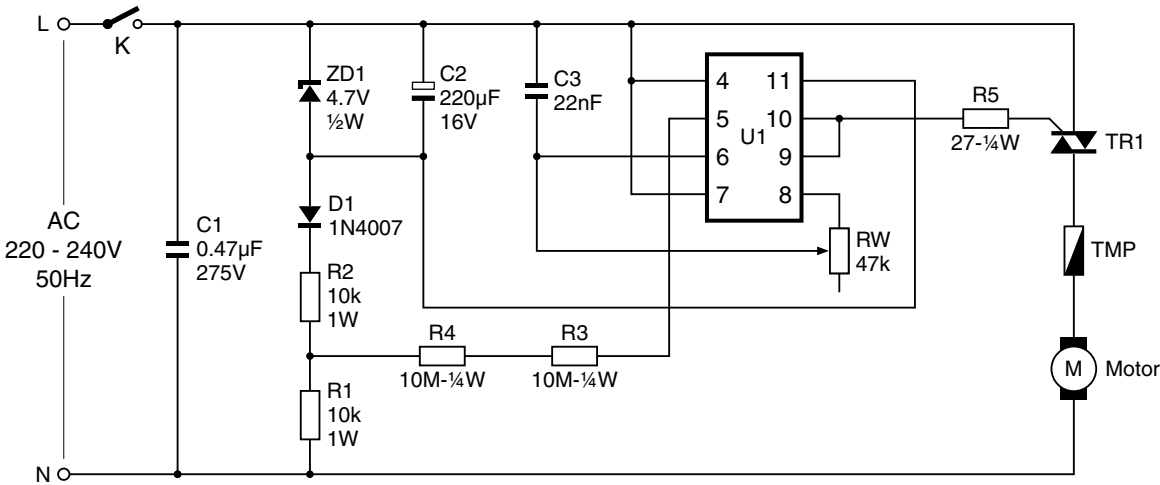



| Pos | Service code   | Description                         | Remark            |
|-----|----------------|-------------------------------------|-------------------|
| 1   | 9965 100 62304 | Lid                                 |                   |
| 2   | 9965 100 62295 | Bucket assy                         |                   |
| 3   | 4322 004 93801 | HEPA filter                         | Buffalo - Mistral |
| 4   | 4322 004 93811 | Sponge                              | Buffalo - Mistral |
| 5   | 9965 100 62285 | Exhaust grille assy                 |                   |
| 6   | 4322 004 93821 | Micro filter                        | Mistral           |
| 7   | 9965 100 62299 | Unlock button Bucket                |                   |
| 8   | 9965 100 62303 | Upper housing                       | Valentine Red     |
| 9   | 9965 100 62291 | CW button                           |                   |
| 10  | 9965 100 62292 | On/Off button                       |                   |
| 11  | 9965 100 62287 | Turning knob                        |                   |
| 12  | 9965 100 62293 | Spring for Buttons                  |                   |
| 13  | 9965 100 62284 | Handle cover (Bucket assy)          |                   |
| 14  | 4322 005 34101 | Cordwinder 6 m / 4.8 plug           | Mistral           |
|     | 4322 005 35701 | Cordwinder 6 m / PRC plug           | Mistral           |
| 15  | 9965 100 62297 |                                     |                   |
| 16  | 9965 100 62288 | Lower housing                       | Deep Black        |
| 17  | 9965 100 60941 | Casterdish assy                     |                   |
| 18  | 4322 006 24891 | PCBA                                | Mistral           |
| 19  | 9965 100 60949 | Switch                              |                   |
| 20  | 9965 100 62294 | Wheel assy                          |                   |
| 21  | 9965 100 62289 | Motor front                         |                   |
| 22  | 4322 006 99361 | KC Motor PHB0 1800 W IEC            | 230 V 50 / 60 Hz  |
|     | 4322 009 00891 | KC Motor PHB0 1800 W IEC            | 230 V 50 / 60 Hz  |
| 23  | 9965 100 62296 | Motor housing                       |                   |
| 24  | 4322 004 25021 | Hose                                | Buffalo - Mistral |
| 25  | 4322 004 25071 | Aluminum TT tube Conical 35 mm      |                   |
| 26  | 4322 004 25131 | Tube clip                           | Deep Black 80231  |
| 27  | 4322 004 25121 | Small nozzle Conical 35 mm          | Deep Black 80231  |
| 28  | 4322 004 25111 | Crevice nozzle Conical 35 mm        | Deep Black 80231  |
| 29  | 4322 004 25101 | All floor nozzle # 34 Conical 35 mm | Deep Black 80231  |

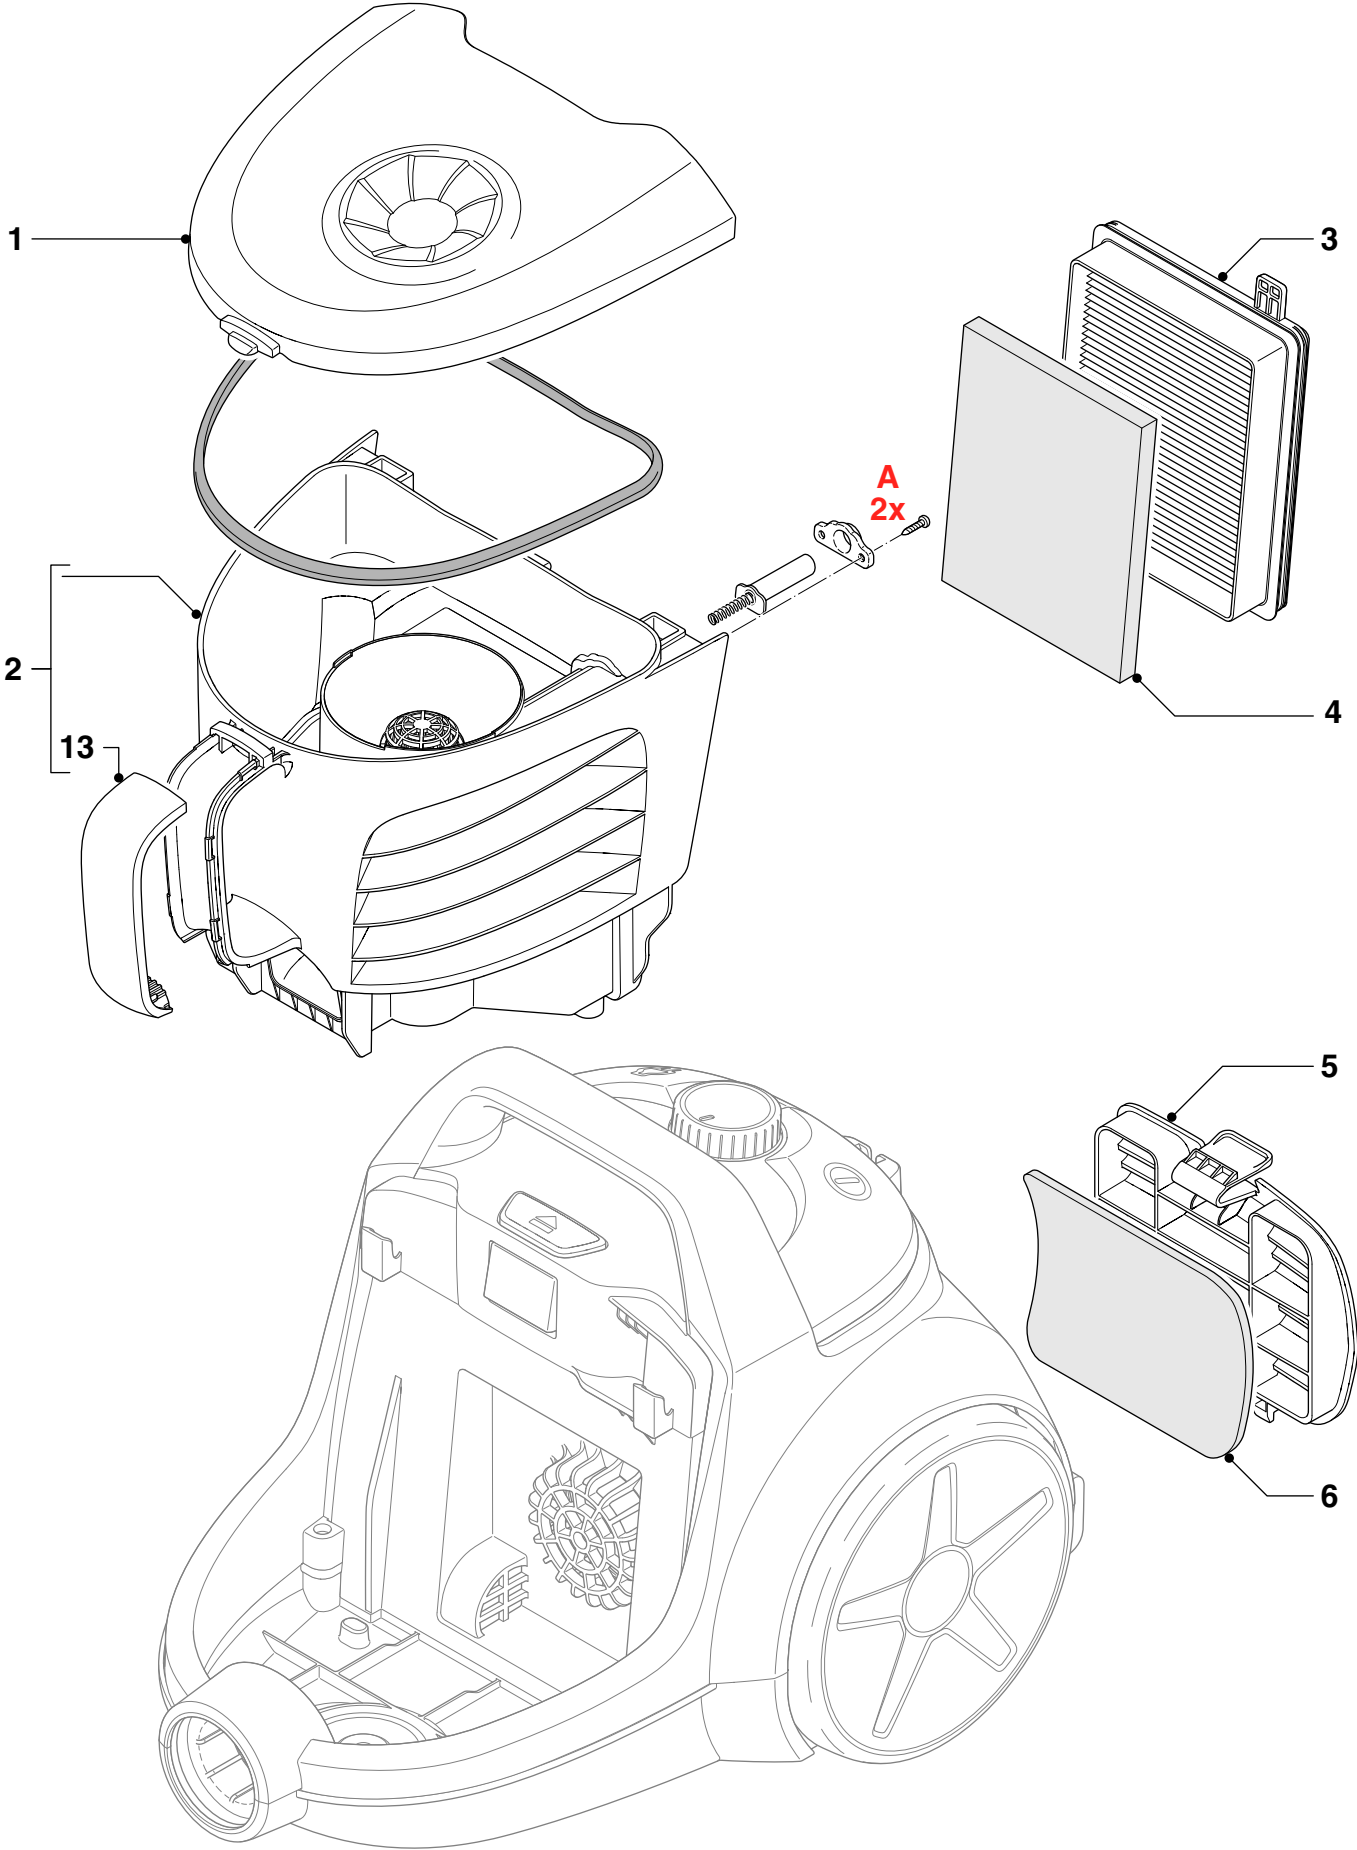

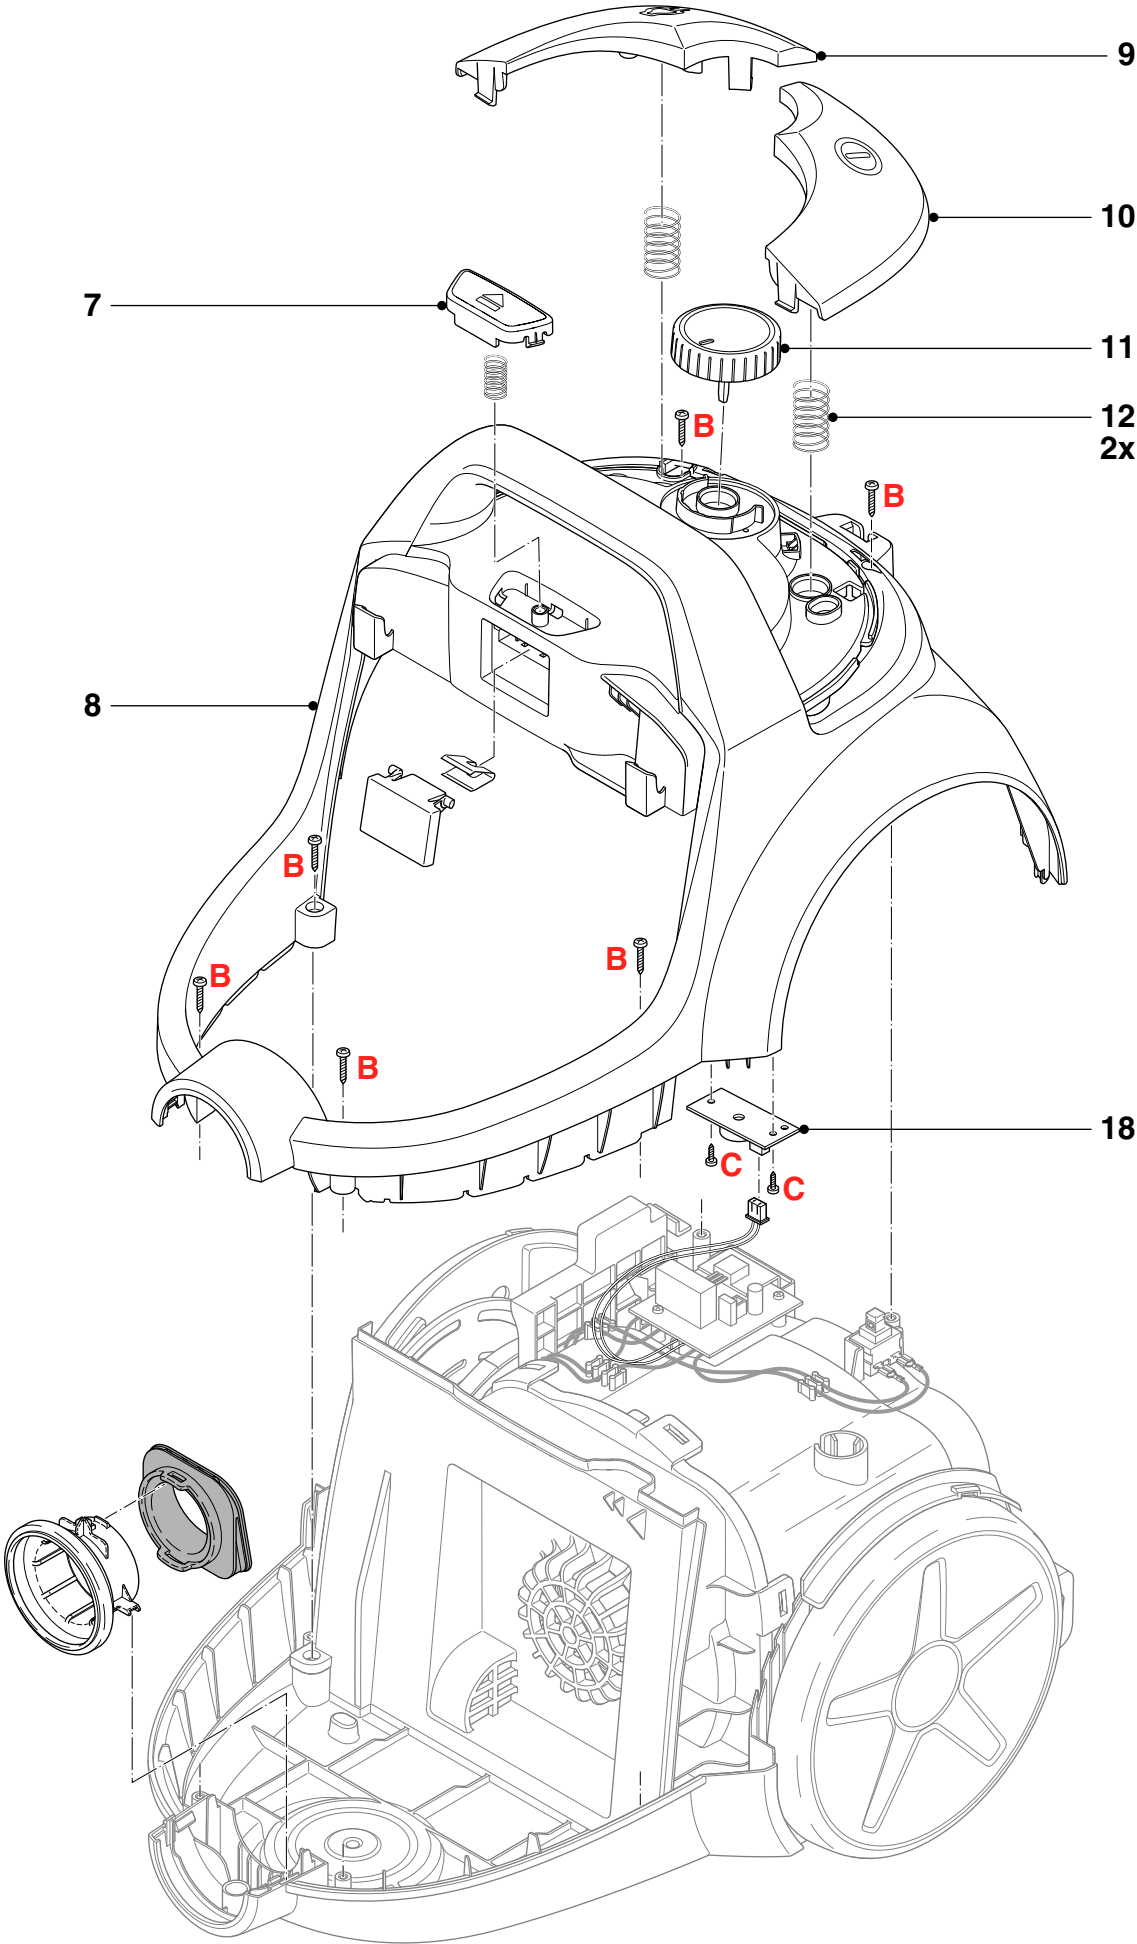

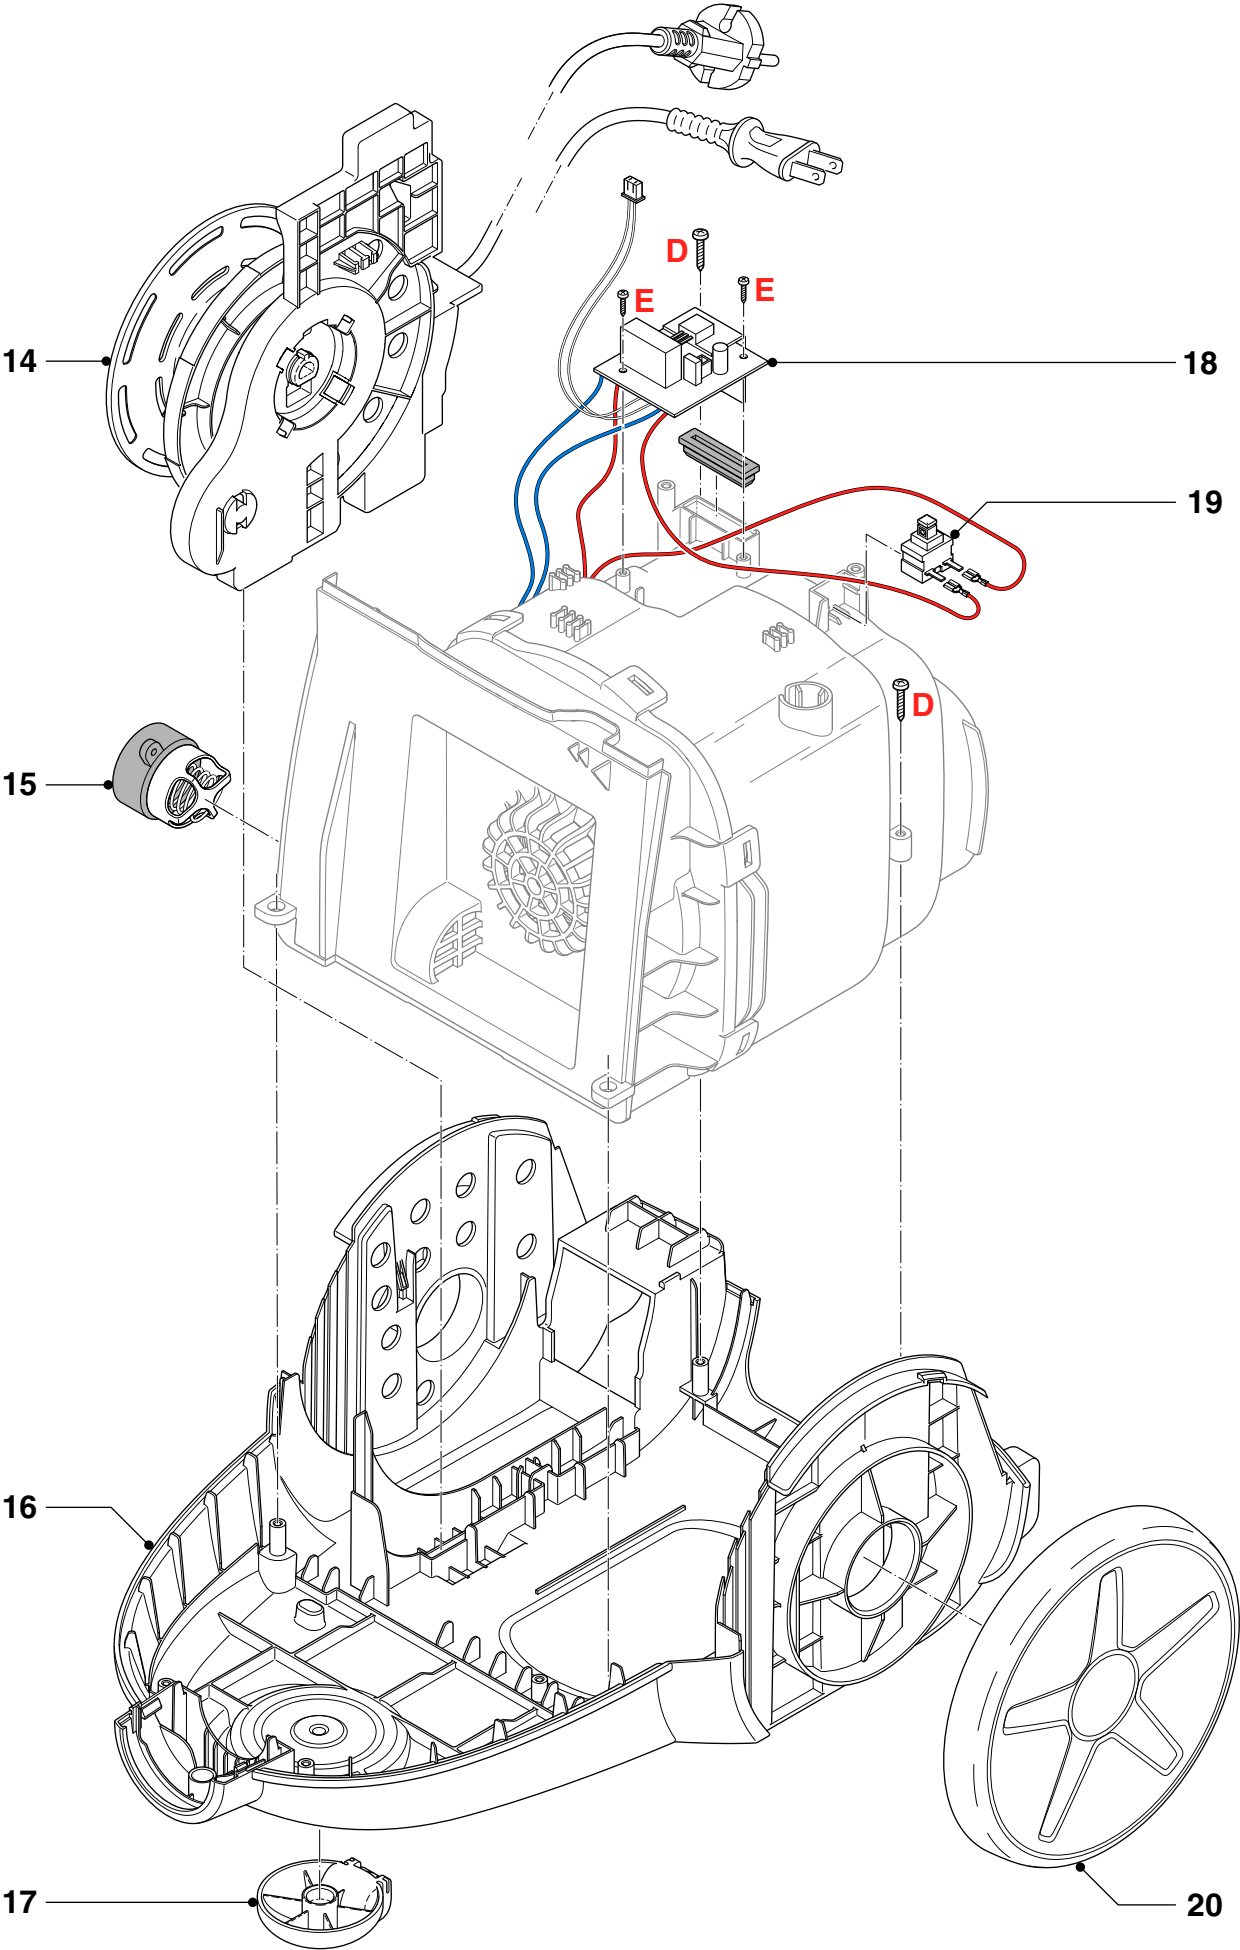

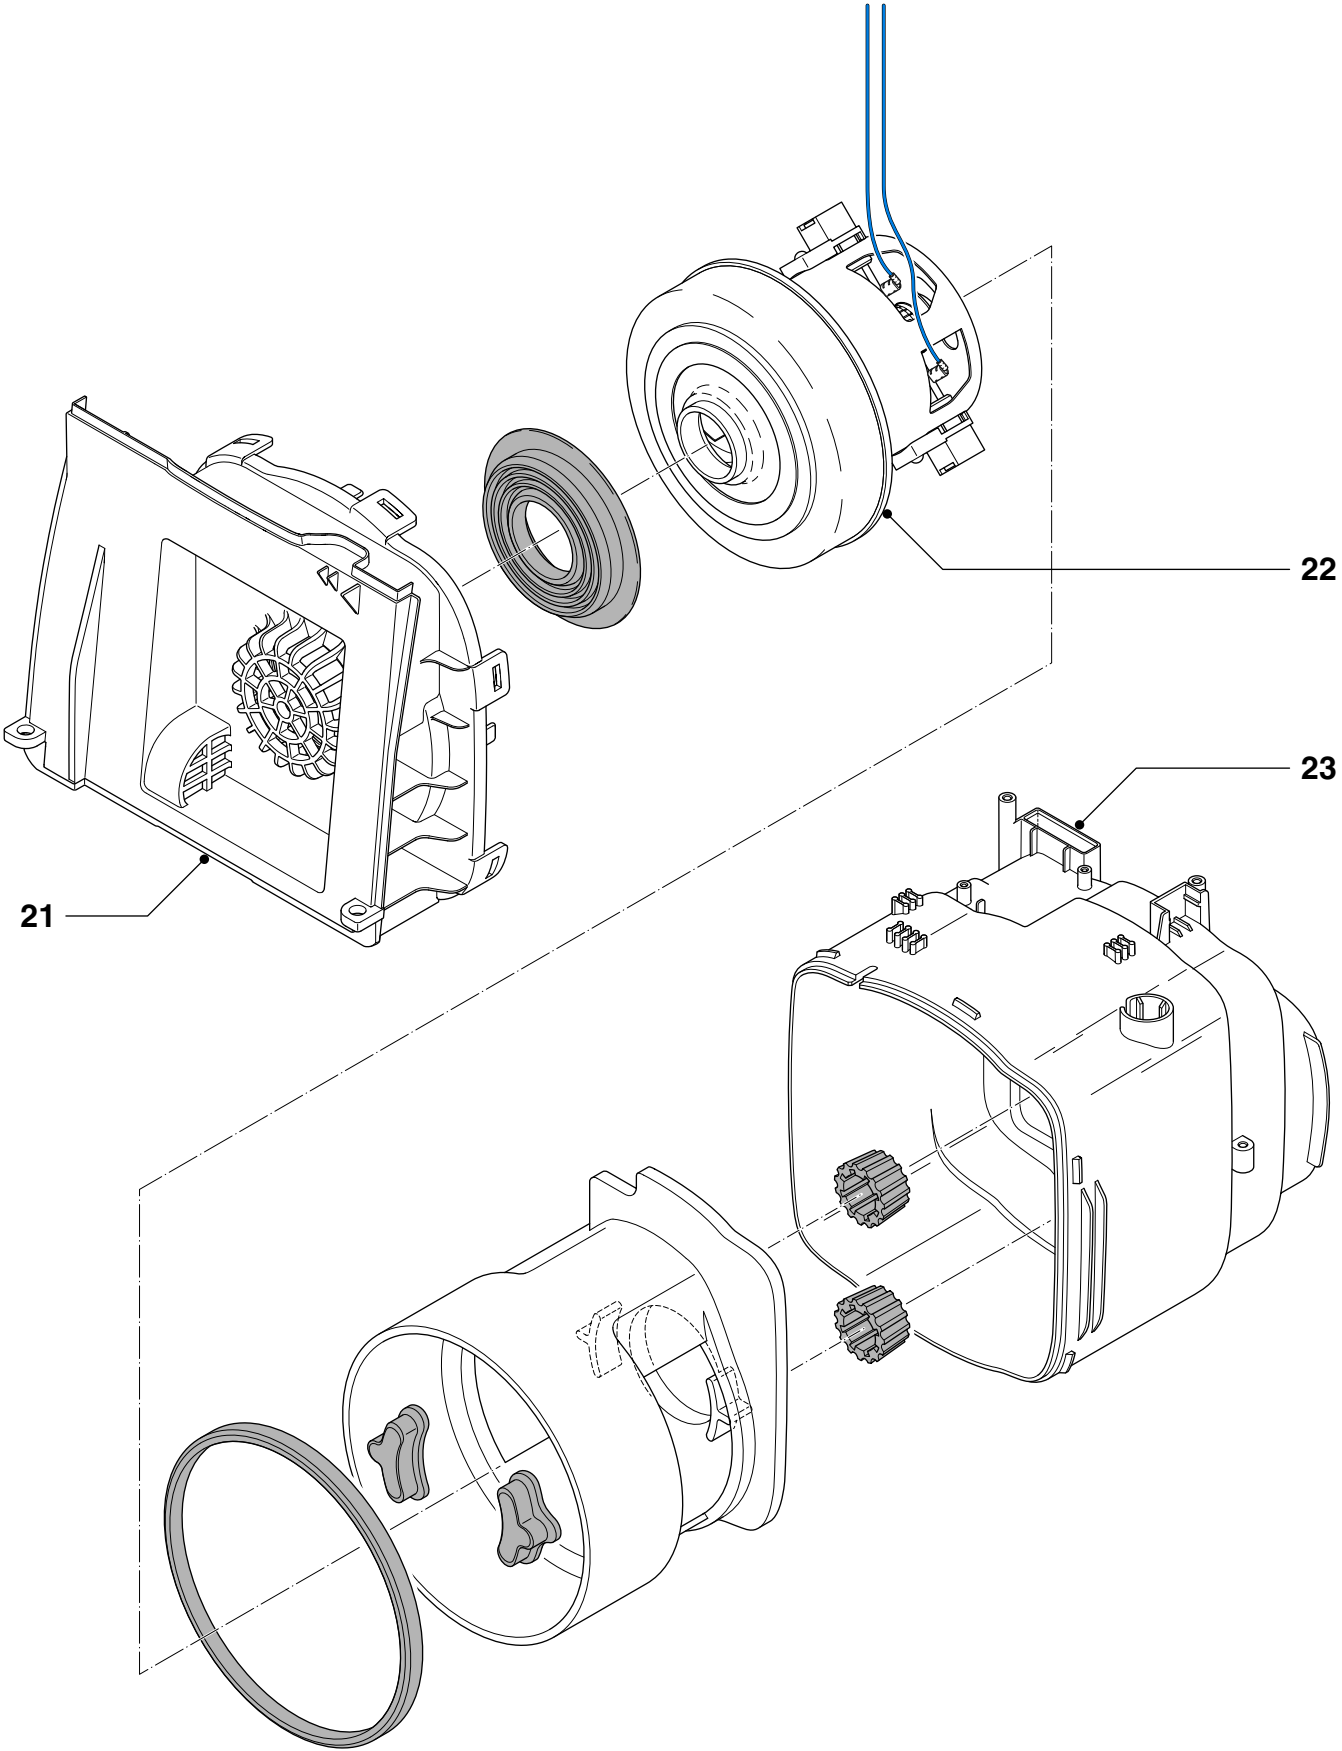

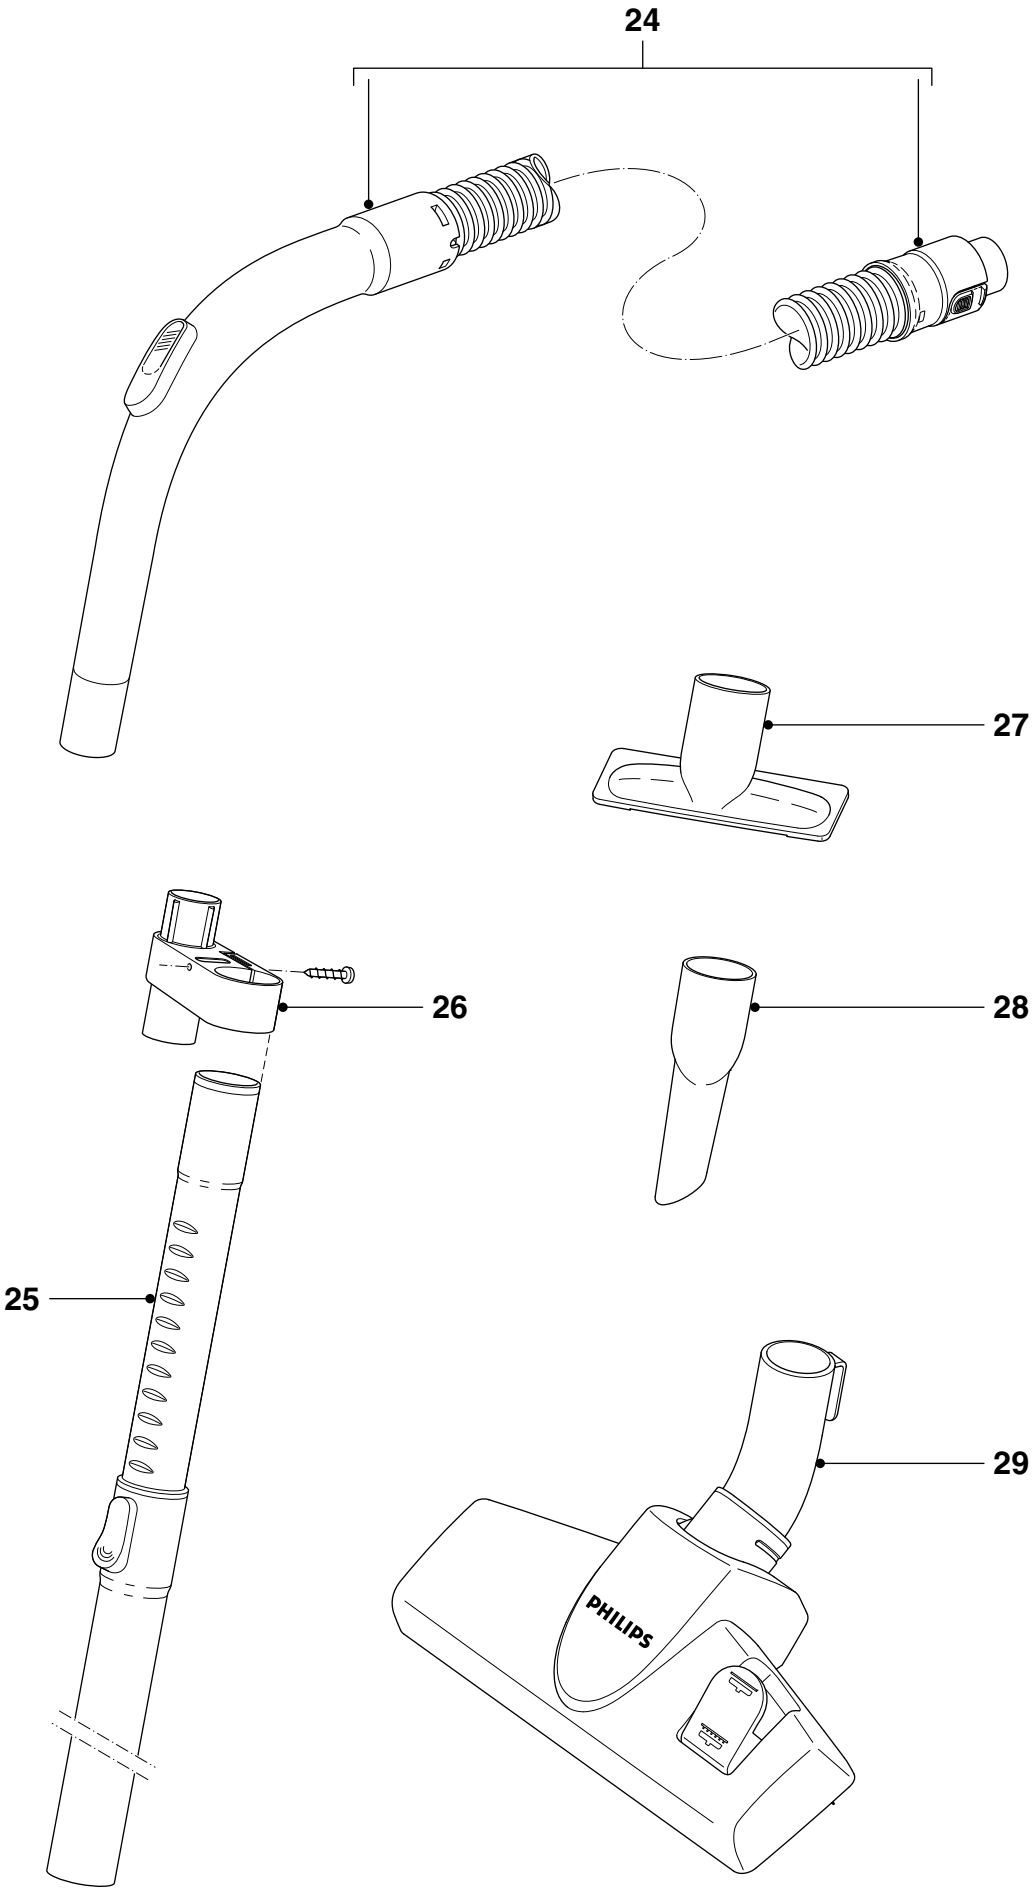

## Version history

Version 1.1 : FC8632/01 initial release.

Version 1.2 : Updated picture on front page.

Added new version: FC8632/81.

In Parts List and Exploded view: Added Pos. 14, 4322 005 35701 Cordwinder 6 m / PRC plug Mistral.

In Parts List: Added Pos. 22, 4322 009 00891 KC Motor PHB0 1800 W IEC 230 V 50 / 60 Hz.