



Philips Domestic Appliances and Personal Care

# Service Manual

## PRODUCT INFORMATION

### Features

- Color : Transparent Blue
- Ceralon soleplate
- Steam output (25 grams/min)
- Extra steam (30 grams/min)
- 2 steam level
- Spray feature
- Tank capacity (250 ml)
- Cord length (1.8 m)
- 180 degrees swivel
- Integrated calc-clean feature
- Integrated cord winder feature

### Safety Information

- This product meets the requirements regarding interference suppression on radio and TV.
- After the product has been repaired, it should function properly and has to meet the safety requirements and legal regulations as officially laid down at this moment.

## TECHNICAL INFORMATION

Voltage	: 100 V, 110 - 127 V : 220 - 240 V
Frequency	: 50 - 60 Hz
Power	: 1200 W, 1050 - 1400 W : 1500 - 1800 W
Dimension (F-box)	: 306 (L) x 128 (W) x 157 (H) mm
Product weight	: 1.2 kg

### Water Advice

Suitable for tap water use. Advice to mix with equal portion of distilled water or use only distilled water if the tap water is very hard.

### Ceralon Soleplate

This Ceralon soleplate glides smoothly, is non-stick & very easy to clean. Ceralon has a high scratch resistance and its durability is competitive in the market.

### Extra Steam

Extra steam features an additional amount of steam for ironing heavily wrinkled garments.

### Integrated Calc-clean

This ensures a longer life time of the iron and to allow the use of normal tap water.

**BACKPLATE 1****SWIVEL 2****CORDSET 3**

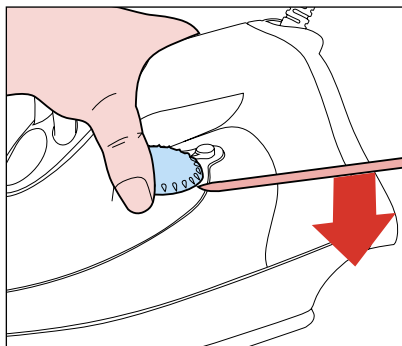
- Remove Screw A 1x
- Remove Backplate 1
- Remove Screw B 2x (cord clamp)

**OPERATION KNOB 4****DOSING UNIT 5****INLAY 6****PUMP 8****NOZZLE 9**

- Remove Screw A 1x
- Remove Backplate 1
- Remove Screw B 2x (cord clamp)
- Remove Cord set 3
- Remove Dosing unit 5
- Remove Screw D 1x
- Remove Inlay 6
- Remove Operation knob 4

**DIAL 10****RATTLE SPRING 11****TANK SET 12****LAMP ASSEMBLY 13****LAMP HOLDER 18**

- Remove Screw A 1x
- Remove Backplate 1
- Remove Screw B 2x (cord clamp)
- Remove Cord set 3
- Remove Dosing unit 5
- Remove Screw D 1x
- Remove Inlay 6
- Remove Operation knob 4
- Remove Screw C 3x

**COVER 14****THERMOSTAT BUSH 15****SOLEPLATE 16****COVER SEAL 102**

- Remove Screw A 1x
- Remove Backplate 1
- Remove Screw B 2x (cord clamp)
- Remove Cord set 3
- Remove Dosing unit 5
- Remove Screw D 1x
- Remove Inlay 6
- Remove Operation knob 4
- Remove Screw C 3x
- Remove Screw E 3x
- Remove Cover 14

**REPAIR INSTRUCTIONS**

- Due to the high voltage of the iron, ONLY the specified cordsets must be used.
- Thermostat that is fitted to the soleplate (Pos 16) was pre-adjusted by the suppliers and secured by glue. To avoid mal-function of the iron, NEVER re-adjust the thermostat.
- No information about the type number and voltage is stamped onto the typeplate. When replacing the cover (typeplate is at the bottom), engrave at least the type number & voltage on the typeplate with a sharp object.
- For easy removal of inlay, unlock catch behind, then twist sideways by holding the central section of the inlay.

**OPTIONAL (accessories)**

- No specific issues

Pos	Service code	Description	Consist of
1	4239 026 12410	Backplate	
2	4239 026 11320	Swivel	
	4239 015 98500	Swivel (Mexico)	
3	4239 000 08500	Cordset - EU	
	4239 000 08530	Cordset - UK	
	4239 000 08540	Cordset - Italy	
	4239 000 08090	Cordset - Middle East, Africa	
	4239 000 09520	Cordset - Mexico	
	4239 000 08520	Cordset - Swiss	
4	4239 026 12480	Operation knob - Spray (Blue)	
5	4239 021 15240	Dosing unit - extra steam	
	4239 021 23980	Dosing unit - extra steam (Mexico)	
6	4239 026 12510	Inlay	
7	4239 015 54210	Sealing - Tank top seal	101
	4239 015 55070	Sealing - Cover seal	102
8	4239 020 90560	Pump	
9	4239 025 99230	Nozzle	
10	4239 021 15220	Dial - French/Dutch text	
	4239 021 20890	Dial - English text	
	4239 021 21970	Dial - English/Italian text	
	4239 021 21220	Dial - Spanish/Portuguese text	
11	4239 026 12460	Plastic rattle spring	
12	4239 021 15130	Tank set - non SOS (Blue)	
13	4239 021 03140	Lamp assembly	
14	4239 026 12860	Cover	
15	4239 026 13220	Thermostat bush	
16	4239 022 54181	Soleplate assembly - LV	
	4239 022 54160	Soleplate assembly - HV	
17	4239 026 05570	Lamp cover	
18	4239 026 12400	Lamp holder	

